

06-19-00

A

## FISH &amp; RICHARDSON P.C.

4350 La Jolla Village Drive  
Suite 500  
San Diego, California 92122

Telephone  
858 678-5070

Facsimile  
858 678-5099

Web Site  
www.fr.com

June 15, 2000

Attorney Docket No.: 08305/074001/99-15

**Box Patent Application**

Commissioner for Patents  
Washington, DC 20231

Presented for filing is a new original patent application of:

Applicant: SANDOR L. BARNAL AND YIBING (MICHELLE) WANG

Title: DUAL SENSITIVITY IMAGE SENSOR

Enclosed are the following papers, including those required to receive a filing date  
under 37 CFR 1.53(b):

	<u>Pages</u>
Specification	9
Claims	12
Abstract	1
Declaration	2
Drawing(s)	3

## Enclosures:

- Assignment cover sheet and an assignment, 2 pages, and a separate \$40 fee.
- Postcard.

There are 32 total claims, 5 of which are independent.

Small entity status established in the provisional filing is still proper and desired.

Basic filing fee	\$345
Total claims in excess of 20 times \$9	\$108

## CERTIFICATE OF MAILING BY EXPRESS MAIL

Express Mail Label No. EL558600673US

I hereby certify that this correspondence is being deposited with the  
United States Postal Service as Express Mail Post Office to Addressee  
with sufficient postage on the date indicated below and is addressed to  
the Commissioner for Patents, Washington, D.C. 20231

June 15, 2000

Date of Deposit

Signature

Derek W. Norwood

Typed or Printed Name of Person Signing Certificate

06/15/00



Jc844 U.S. PRO  
Frederick P. Fish  
1855-1930

W.K. Richardson  
1859-1951



BOSTON

DALLAS

DELAWARE

NEW YORK

SAN DIEGO

SILICON VALLEY

TWIN CITIES

WASHINGTON, DC

06/15/00

FISH & RICHARDSON P.C.

Commissioner for Patents

June 15, 2000

Page 2

Independent claims in excess of 3 times \$39	\$78
Fee for multiple dependent claims	\$0
Total filing fee:	\$531

This application claims priority from provisional application 60/139,345 filed 06/15/1999.

A check for the filing fee is enclosed. Please apply any other required fees or any credits to deposit account 06-1050, referencing the attorney docket number shown above.


If this application is found to be incomplete, or if a telephone conference would otherwise be helpful, please call the undersigned at (858) 678-5070.

Kindly acknowledge receipt of this application by returning the enclosed postcard.

Please send all correspondence to:

SCOTT C. HARRIS  
Fish & Richardson P.C.  
Customer Number: 20985  
4350 La Jolla Village Drive, Suite 500  
San Diego, CA 92122

Respectfully submitted,

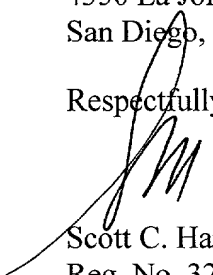  
Scott C. Harris  
Reg. No. 32,030  
Enclosures  
SCH/rpi  
10039089.doc

APPLICATION  
FOR  
UNITED STATES LETTERS PATENT

TITLE: DUAL SENSITIVITY IMAGE SENSOR  
APPLICANT: SANDOR L. BARNA AND YIBING (MICHELLE) WANG

CERTIFICATE OF MAILING BY EXPRESS MAIL


Express Mail Label No. EL558600673US

I hereby certify that this correspondence is being deposited with the United States Postal Service as Express Mail Post Office to Addressee with sufficient postage on the date indicated below and is addressed to the Commissioner for Patents, Washington, D.C. 20231.

June 15, 2000

Date of Deposit

Signature



Derek W. Norwood

Typed or Printed Name of Person Signing Certificate

**DUAL SENSITIVITY IMAGE SENSOR**

This application claims priority from Provisional  
application no 60/139345, filed 6/15/99.

5

**BACKGROUND**

The dynamic range of a typical CMOS image sensor  
10 is between 65 and 75dB. The scene dynamic range, however,  
may extend over more than 5 orders of magnitude. If the  
scene dynamic range exceeds the sensor dynamic range, then  
portions of the image may be clipped or distorted in the  
darkest or brightest areas of the scene.

15 Techniques for extending dynamic range have  
included using both non-linear sensors and linear sensors.  
The non-linear sensors may cause image lag, have a large  
pixel size, cause inflexible or destructive compression,  
loss of contrast, increased noise or long integration time.  
20 Linear sensors may have excellent contrast and improved  
noise processing. They may also produce excellent  
opportunities for post-processing, since the output is  
typically directly related to the input.

A high dynamic range linear sensor often takes several  
25 integrations of the same scene. Each integration has a

different integration time. The varying sensitivity of the different integrations can provide more information about the scene. When each integration is completed, each pixel may be accessed several times to obtain all the  
5 information. This necessity to access the pixels may decrease the frame rate of the sensor. A frame memory may also be necessary to store the results of the integration temporarily.

10 SUMMARY

The present system uses obtains two integrations of the same image, at the same time, using a photoreceptor, and the auxiliary part for the photoreceptor.

15 An embodiment discloses using a photogate which has an associated floating diffusion used. Both the photogate and the floating diffusion simultaneously acquire information about the image. The photogate may be more efficient and produces a higher sensitivity value than the floating diffusion. In this way, both a high and a low sensitivity  
20 version of the image can be obtained. The information may have an increased dynamic range.

BRIEF DESCRIPTION OF THE DRAWINGS

These and other aspects will now be described in detail with reference to the accompanying drawings.

Figure 1A shows the layout of a CMOS image sensor array including the image acquisition part and the signal processing part;

Figure 1B shows a circuit diagram of a single pixel and a single part of the column signal processor; and

Figure 2 shows a diagram illustrating the flow of operation.

#### DETAILED DESCRIPTION

The present application describes using a photoreceptor of a type that has an associated part that stores charge. The photoreceptor can include a photogate and the associated part can be a floating diffusion that stores charge from the photogate. This can facilitate obtaining two images of the same scene at the same time. The two images have different sensitivities. It is recognized by the present inventors that the photogate pixel actually has two electron collecting areas. The photogate itself collects electrons. The floating diffusion area also collects electrons, but does so at a lower efficiency, as compared with the photogate.

Hence, during the integration period, the photogate area generates a higher sensitivity signal, and the floating diffusion generates a lower sensitivity signal. The lower sensitivity signal may have an integration time which is equal to or less than the integration time of the higher sensitivity signal. The lower sensitivity node is 30 to 40 times less sensitive than the high sensitivity node. This sensitivity, however, can vary depending on the ratio between photogate area and area of the floating diffusion. Different pixels can be designed with different ratios. These can be determined, for example, by trial and error.

Figure 1A shows an overall layout of the sensor chip. A single silicon substrate 99 has integrated therein a photosensor array 100 which includes a plurality of pixel photosensor elements arranged in rows and columns. Each of the pixels, such as 102, preferably has the same structure. The same substrate 99 also includes an image processor part 110, formed of a plurality of circuits 112. Each of the image processor circuits preferably has identical structure. Also integrated on the chip 99 is a controlling element 120, which produces control signals that control the flow of the operation on the chip.

Each of the transistors on the substrate are preferably formed of MOS type circuit elements. The control structure can be CMOS.

Figure 1B shows a detailed schematic of the structure of the pixels 102 and an associated processing circuit 112. The signals described herein are produced by the control circuit 120, which can be a small processor, or can be hardwired logic, which is created using hardware definition language. The system preferably uses a photosensor of a type which has an associated charge storage part. One recognition of the present application is that this associated charge storage part will also integrate charge from incoming light. However, the charge integration may be less efficient than the actual photoreceptor. In this embodiment, the photoreceptor is a photogate 150, which has an associated node 151. The node 151 is maintained separated from a floating diffusion 152. A transfer gate 154 separates the charge stored in the photogate 150 from the floating diffusion 152. The TX gate is held at a fixed voltage of about 1.2 volts, which is a slightly "ON" state. This forms a barrier to the charge under the photogate, when the photogate is biased high, say at 5 volts. When the photogate is pulsed low, e.g., to 0 volts, the TX gate



forms a channel, allowing the charge to pass to the floating diffusion. The control of the photogate voltage PG is produced by the control circuit 120.

The level of the floating diffusion can be adjusted by  
5 the reset transistor 155. The reset signal RXT connects the reset transistor to the voltage  $V_{AA}$ , which is a reset voltage. The level on floating diffusion 152 is also buffered by a follower 158, and can be sampled. A row select transistor 160 is actuated by the control circuit  
10 120 to select that specified row of pixels. A plurality of other row select transistors from different rows are connected to the node 162. Only one row is preferably selected at any one time. Each column of pixels is associated with a column signal processor shown as 112.  
15 The column signal processor processes the signals described herein. As shown, three sample and hold circuits are provided. A first sample and hold circuit 165 stores the reset level. The SH\_RST signal from the control circuit 120 turns on the transistor 166 thus storing the reset  
20 level into the capacitor 168. Analogously, the other sample and hold circuit 170 stores the floating diffusion level, and the third sample and hold circuit 175 stores the photogate signal. An arithmetic processor 175 can be

provided to provide any desired combination of these signals.

The low sensitivity signal can correspond to the floating diffusion values subtracted from the reset value.

5 The photogate value can correspond to the photogate sample and hold level, subtracted from the floating diffusion value, and optionally also subtracted from the reset value. Each of the pixels in a specific row receives the same row select signal to the base of the transistor 160 that is  
10 associated with each pixel in that row. This turns on all of the transistors in a row at once, thereby selecting the entire row at once. All transistors in all other rows are maintained off. One value from each column is thereby obtained at any time, into a corresponding signal  
15 processing unit 112. This allows the system to operate in a so-called column/parallel mode wherein an entire row of pixel outputs are obtained.

The operation occurs as shown in Figure 2. During each cycle, the system is first reset as shown as 250, to a  
20 reset level. The reset value is sampled at 255. The reset value is sampled during this time by selecting the row, and actuating the SH\_RST signal to provide the reset signal onto the associated capacitor 168. The photogate mode

integration begins at the time of reset shown as 240. The floating diffusion integration begins at time 245, after the sample reset value is detected.

At the end of the integration time, the floating diffusion 152 has integrated charge. This is sampled at time 200, to obtain the value of the FD sample. This value is then actuated into the sample and hold circuit 170. The photogate also includes charge. After sampling the floating diffusion, the transfer gate 154 is actuated by producing the signal TX from the controller. This dumps the charge from the photogate 150 into the floating diffusion and the floating diffusion is again sampled at 210 to obtain the photogate value. This value is then held in the sample and hold 175.

Both the photogate and the floating diffusion integrate during the same time period. At least 80% of the integration time is preferably common. The time of integration of the FD may be slightly less, to accommodate sampling values on the floating diffusion. However, since the time of integration is mostly common, the same scene is imaged.

Although only a few embodiments have been disclosed in detail above, other embodiments are possible. For example,

while the embodiment disclosed above describes using the photogate, it could also be done with other kinds of light sensing devices. An important feature is that two different levels of charge, at two different sensitivities, 5 are sampled into different node at least partly simultaneously.

All such modifications are intended to be encompassed within the following claims.

What is claimed is:

1. An image sensor comprising:

a plurality of image sensing pixel portions; and

5 a plurality of image processing portions;

each said image sensing pixel portion including a photoreceptor, which has a first sensitivity to light and produces charge based on an amount of incident light, and an associated portion for said photoreceptor, which  
10 associated portion selectively receives charge from said photoreceptor but which by itself has a second sensitivity to light different than said first sensitivity to light and produces charge based on an amount of incident light, an in-pixel follower transistor, and an in-pixel select  
15 transistor; and

wherein each said image processing portion includes circuitry that produces an output indicative of both an amount of charge received by said associated portion, and an amount of charge received by said photoreceptor.

20

2. A sensor as in claim 1 wherein said photoreceptor is a photogate, and said associated portion is a floating

diffusion associated with said photogate in each said pixel.

3. A sensor as in claim 2 further comprising a transfer gate, located between said photogate and said floating diffusion, which separates charge stored in said photogate from said floating diffusion.

4. A sensor as in claim 2 further comprising, in each said pixel, a reset transistor, connected between a reset level and said floating diffusion, and which operates to reset a value of said floating diffusion to a specified level.

5. A sensor as in claim 2 wherein each of said photogate, said floating diffusion, and said in-pixel transistors are formed of MOS-type technology.

6. A sensor as in claim 2 wherein said image processing portion includes a plurality of sample and hold circuits.

7. A sensor as in claim 6 wherein said plurality of sample and hold circuits include a first sample and hold circuit storing a reset level, a second sample and hold circuit storing a photogate level, and a third sample and  
5 hold circuit storing a floating diffusion level.

8. A sensor as in claim 7 further comprising a circuit which outputs a first, low sensitivity output indicative of a difference between said floating diffusion  
10 level and said reset level and a second, high sensitivity output indicative of a difference between said photogate level and said reset level.

9. A sensor as in claim 2 further comprising a  
15 controlling circuit, operating to control times of integration of said photogate and said floating diffusion, such that said floating diffusion integrates for a same time or less time than an integration time of said photogate, and such that at least part of the time of  
20 integration of said floating diffusion overlaps a time of integration of said photogate.

10. A sensor as in claim 2 wherein there are a plurality of said image processing circuits, each of which are substantially identical, each image processing circuit associated with an entire column of pixels.

5

11. A sensor as in claim 10 further comprising a control circuit, which produces a row select signal to each of a plurality of pixels in a single row, to provide outputs from said each of said plurality of pixels to an individual image processing circuit.

10

12. A method of imaging, comprising:

imaging a scene by simultaneously obtaining both a high sensitivity signal and a low sensitivity signal in each of a plurality of pixels of an image sensing device, using an integration period which is at least 80% overlapping for both high sensitivity signal and a low sensitivity signal, both said high sensitivity and low sensitivity signals being obtained within the pixel itself;

15

20 and

outputting both of said high sensitivity signal and low sensitivity signal.



13. A method as in claim 12 wherein said obtaining comprises providing both a photosensor and an associated device that is associated with said photosensor which normally obtains charge from said photosensor, said  
5 photosensor obtaining the high sensitivity signal and said associated device obtaining the low sensitivity signal.

14. A method as in claim 13 wherein said photosensor is a photogate and said associated device is a floating  
10 diffusion which receives charge from said photogate.

15. A method as in claim 14 further comprising:  
15 obtaining a signal by determining a reset level of the floating diffusion;

determining an integrated value indicating the level of the floating diffusion, obtained by integrating a scene for a first specified time;

20 obtaining a second integrated level, obtained by integrating the scene in said photogate for a second specified time; and

outputting differences between said reset, photogate,  
and floating diffusion levels.

16. A method as in claim 15 wherein said first  
5 integration time of said floating diffusion is less than or  
equal to said second integration time of said photogate.

17. A method as in claim 15 wherein said obtaining  
and determining comprises first sampling said reset level,  
10 then sampling said floating diffusion level, and then  
transferring a photogate level to said floating diffusion  
level and sampling said floating diffusion level again to  
obtain a photogate level.

18. A photosensor device comprising:

a single continuous substrate of semiconductor  
material;

an image sensor portion, formed on said substrate of  
semiconductor material, said image sensor portion including  
20 an array of image sensor pixels, including photoreceptors,  
arranged in rows and columns, each of said pixels formed of  
an MOS electronic component;

an image processing portion, also formed on said substrate, and connected to said image sensor portion such that each pixel can be selectively coupled to a specified portion of said image processing portion, said image processing portion including a plurality of transistors, each of which are formed of MOS transistors, and a plurality of which of formed of CMOS transistors; and

a control portion, controlling integration of photoreceptors in said image sensor portion including times of said integrations, and also controlling connections between said image sensor and said image processing portion, and controlling timing of operations in said image processing portion,

each of said pixels and said image sensor including a photoreceptor, a transfer gate, and an associated portion that selectively receives charge from said photoreceptor via said transfer gate, a reset transistor, a follower transistor, coupled to said associated portion, and operating to buffer the value of said associated portion, and a selection transistor, coupled to said control portion, said control portion controlling said selection transistor to produce an output from the specified pixel such that a level of the associated portion is first

sensed, and then values are coupled from said photoreceptor into said floating diffusion and to sample values on said floating diffusion, said values provided to said image processing portion.

5

19. A device as in claim 18 wherein said image processing portion includes a plurality of sample and hold circuits therein, including a reset sample and hold which samples a reset level, associated device sample and hold circuit which samples the level of said associated device, and a photoreceptor sample and hold which samples a level of said photoreceptor.

10

20. A device as in claim 19 further comprising a subtraction element which subtracts said reset level from said associated level to produce the low sensitivity signal and subtract at least one other level from said photoreceptor signal to produce a high sensitivity signal.

15

21. A device as in claim 19 wherein said photoreceptor includes a photogate and said associated device includes a floating diffusion associated with said photogate.

20

22. A device as in claim 21 wherein said image processing portion includes a plurality of sample and hold circuits, a first sample and hold circuit sampling a reset  
5 level, a floating diffusion sample and hold circuit sampling a level in the floating diffusion prior to transfer of photogate charge thereto and a photogate sample and hold circuit sampling a level on the floating diffusion after transfer of photogate charge thereto.

10 23. A device as in claim 22 wherein said sample and hold circuits are controlled by said control portion.

24. A device as in claim 18 wherein said image  
15 processing portion includes a plurality of image processing circuits, arranged such that one image processing circuit is associated with an entire column of said image sensor pixels, and said control circuit controls said image sensor pixels to select an entire row of image sensor pixels at  
20 one time, said entire selected row being coupled simultaneously to different ones of said image processing circuits to determine values therefrom to thereby operate to output an entire column in parallel.

25. A device as in claim 18 further comprising a reset transistor in each of said pixels.

5        26. A device as in claim 21 wherein said control portion controls integration times of both said photogate and said floating diffusion by controlling the reset transistor to said floating diffusion to first reset said floating diffusion, then control said select transistor to  
10 sample the level on said floating diffusion.

27. A method of obtaining images of different sensitivities, comprising:

allowing integration to occur in a floating diffusion  
15 associated with a photogate;

first sampling a level of integration which has occurred in said floating diffusion and then transferring charge from said photogate to said floating diffusion and sampling the level that has occurred in said photogate; and

20        outputting two values indicative respectively of a low sensitivity signal and a high sensitivity signal that were integrated at substantially the same time, based on said floating diffusion signal and said photogate signal.

28. A method as in claim 27 wherein said low sensitivity signal corresponds to said floating diffusion signal subtracted from said reset signal.

5

29. A method as in claim 27 wherein said high sensitivity signal corresponds to said photogate signal subtracted from said floating diffusion signal.

10

30. A method as in claim 27 wherein said floating diffusion is 30-40 times less sensitive to light than said photogate.

15

31. A method of obtaining an image, comprising:  
obtaining two different signals of different levels, from two different photosensing devices of two different sensitivities, which are substantially simultaneously integrated; and

20

outputting first and second sensitivity signals, based on said two different signals.

32. A method as in claim 31, further comprising,  
storing said two different signals into respective sample  
and hold circuits.



**ABSTRACT**

A system of taking images of different sensitivities at the same time uses both an image sensor, and an auxiliary part to the image sensor. The image sensor element can be a photogate, and the auxiliary part can be the floating diffusion associated with the photogate. Both the photogate and the floating diffusion accumulate charge. Both are sampled at different times. The floating diffusion provides a lower sensitivity amount of charge than the photogate itself. The system can have a photogate and floating diffusion in each pixel along with a select transistor, a reset transistor, and a follower transistor. All of this circuitry can be formed of CMOS for example. The system can also operate in a column/parallel mode, where each column of the photo sensor array can have a column signal processor which samples and holds the reset signal, the floating diffusion signal and the photogate signal.

10038806.doc

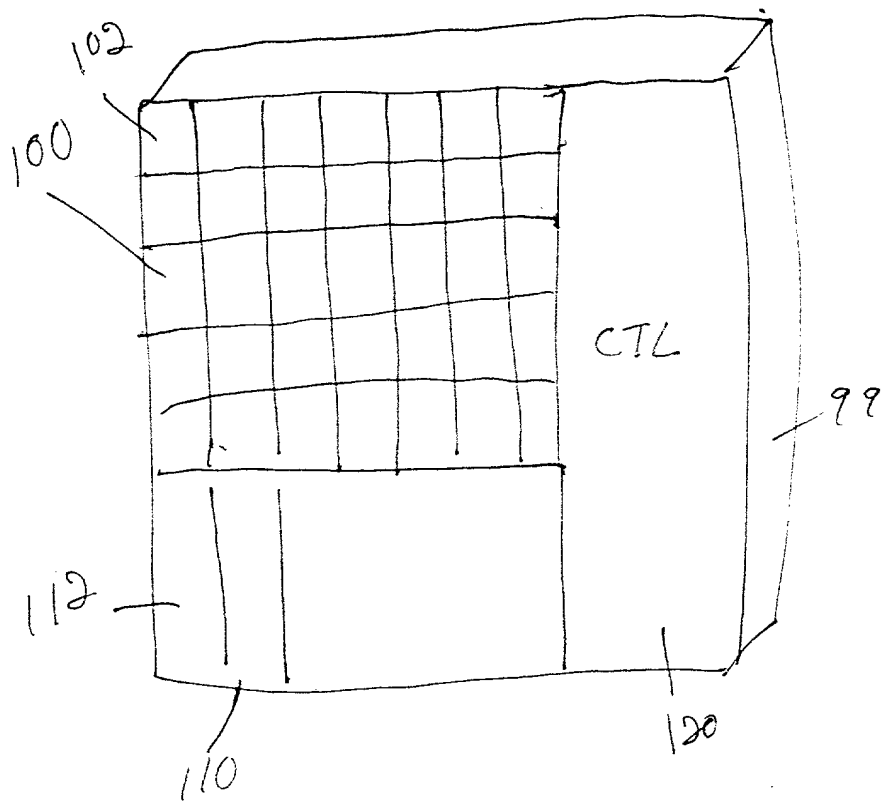


FIG 1A

005790-2-2000

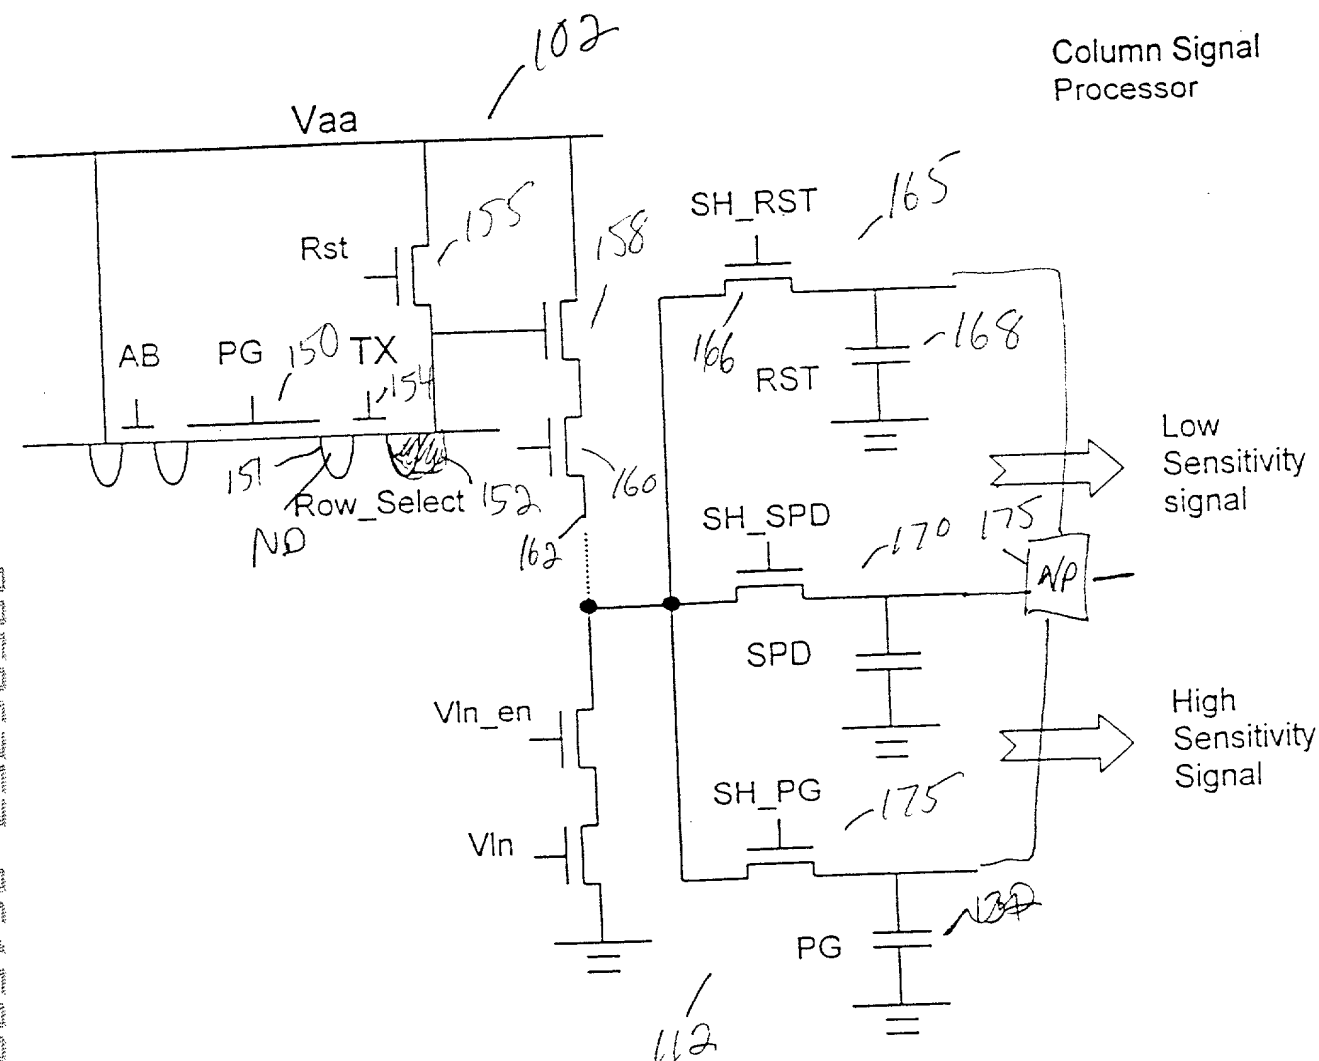


Fig 1: Photogate structure and the readout circuit for two images of different sensitivities.

FIG 1B

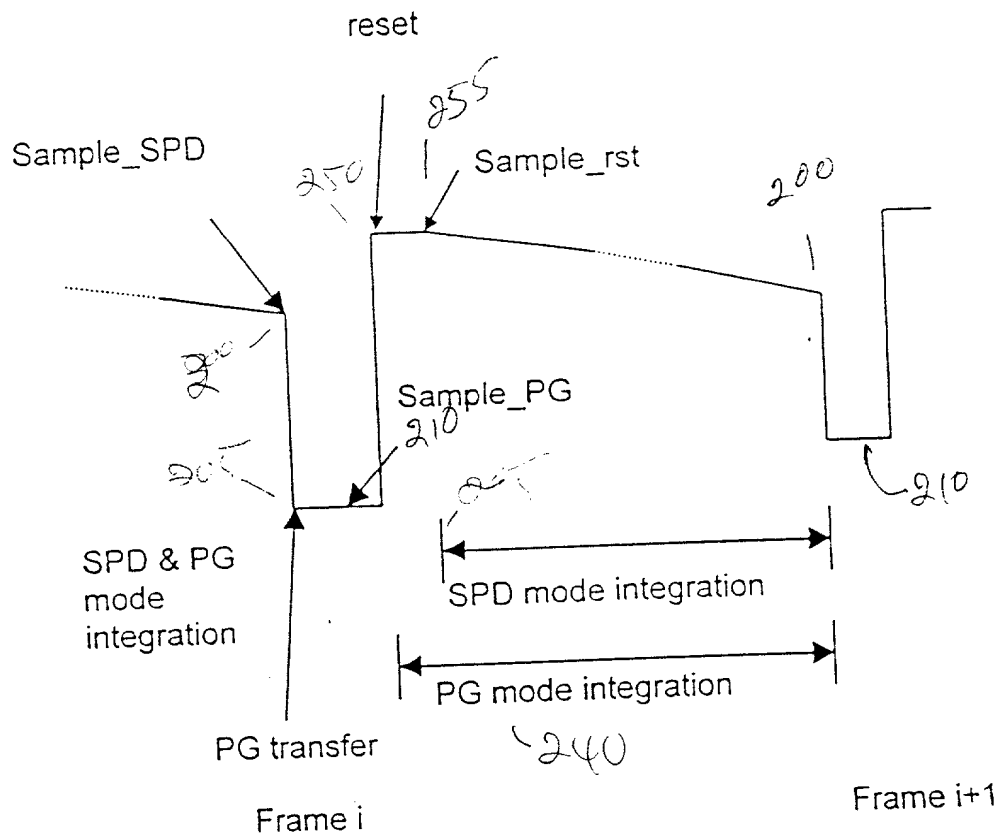


Fig 2: Voltage change of the floating diffusion and readout timing.

Attorney's Docket No.: 08305/074001/99-15

**COMBINED DECLARATION AND POWER OF ATTORNEY**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled DUAL SENSITIVITY IMAGE SENSOR, the specification of which:

- ☒ is attached hereto,  
☐ was filed on \_\_\_ as Application Serial No. \_\_\_ and was amended on \_\_\_\_\_.  
☐ was described and claimed in PCT International Application No. \_\_\_\_\_ filed on \_\_\_\_\_ and as amended under PCT Article 19 on \_\_\_\_\_.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose all information I know to be material to patentability in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim the benefit under Title 35, United States Code, §119(e)(1) of any United States provisional application(s) listed below:

U.S. Serial No.	Filing Date	Status
60/139,345	06/15/1999	Pending

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose all information I know to be material to patentability as defined in Title 37, Code of Federal Regulations, §1.56(a) which became available between the filing date of the prior application and the national or PCT international filing date of this application:

U.S. Serial No.	Filing Date	Status
-----------------	-------------	--------

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed:

Country	Application No.	Filing Date	Priority Claimed
			<input type="checkbox"/> Yes <input type="checkbox"/> No
			<input type="checkbox"/> Yes <input type="checkbox"/> No

I hereby appoint the following attorneys and/or agents to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

**Combined Declaration and Power of Attorney**

Page 2 of 2 Pages

Scott C. Harris, Reg. No. 32,030  
David L. Feigenbaum, Reg. No. 30,378  
Hans R. Troesch, Reg. No. 36,950  
Bing Ai, Reg. No. 43,312  
Samuel L. Lee, Reg. No. 42,791  
Frederick H. Rabin, Reg. No. 24,488

William J. Egan, III, Reg. No. 28,411  
Dorothy Whelan, Reg. 33,814  
John R. Wetherell, Jr., Reg. No. 31,678  
James T. Hagler, Reg. 40,631  
Richard J. Anderson, Reg. No. 36,732  
Samuel Borodach, Reg. No. 38,388  
Kenyon Jenckes, Reg. No. 41,873

Address all telephone calls to SCOTT C. HARRIS at telephone number (858) 678-5070 ext 4321.

Address all correspondence to SCOTT C. HARRIS at:

FISH & RICHARDSON P.C.  
Customer Number: 20985  
4350 La Jolla Village Drive, Suite 500  
San Diego, CA 92122

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patents issued thereon.

Full Name of Inventor: YIBING (MICHELLE) WANG

Inventor's Signature: 

Date: 6/15/00

Residence Address: La Jolla, CA

Citizenship: China

Post Office Address: 2500 Torrey Pines Rd. #401, La Jolla, CA 92037

Full Name of Inventor: SANDOR BARNA

Inventor's Signature: 

Date: 6/15/00

Residence Address: Pasadena, CA

Citizenship: USA

Post Office Address: 163 N. Marengo Ave #302, Pasadena, CA 91101